



ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THE LATEST EDITION OF THE WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION

NOTES:


1. All concrete shall be air entrained concrete class 3000.
2. Concrete sealer to be placed within (2) two hours after finishing is complete.
3. Expansion joints consisting of 3/8" full depth pre molded joint material shall be placed around fire hydrants, poles, meter boxes, and other obstructions and along walls or structures in paved areas. Expansion joints shall be placed at the beginning and end of each curve, on each side of structures, drop curb driveways and curb ramps, between sidewalk and back of curb when poured separately, and at other locations as directed by the engineer. Pre-molded expansion joints shall conform to WSDOT Spec. 9-04.1.
4. Expansion joints at curb must align with expansion joints in sidewalk.
5. All joints shall be clean and edged. Joint sealant of sawed construction joints shall meet the requirements of section 9-04.2 of the WSDOT / APWA specification.
6. Cement concrete sidewalks shall be a minimum of 4 inches thick except in driveway areas where a minimum of 6 inches is required.
7. Finish shall be broomed transverse to the run of the sidewalk (perpendicular to the curb/gutter line).
8. Edging shall be 1 1/2" wide smooth borders with 1/4" edge radius. All Joints shall also have 1/4" edge radius.
9. Sidewalks greater than 5 Feet in width - contact Cowlitz County Department of Public Works for specifications.
10. See County Standard Plan CC-1201 for Curb & Gutter Details.

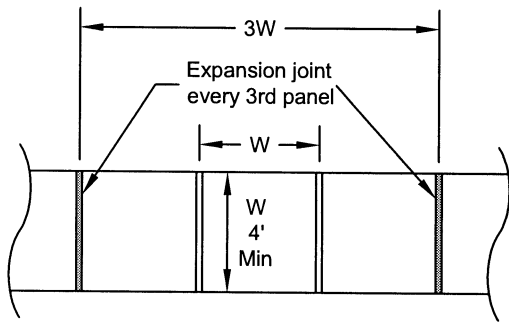


PLAN

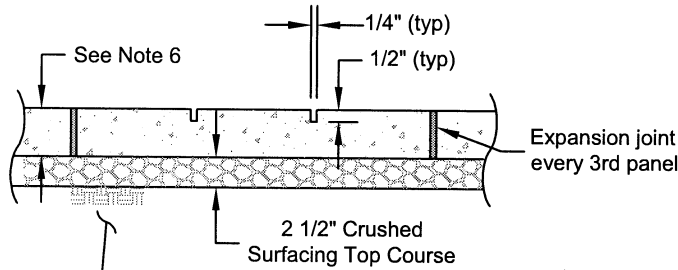

PROFILE

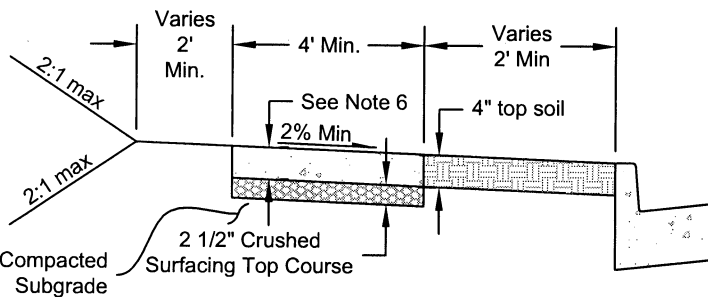

DETACHED SIDEWALK
SECTION VIEW

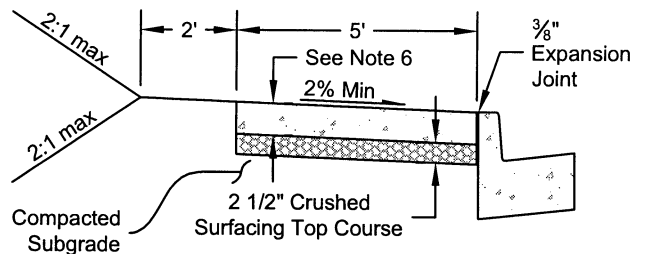

ATTACHED SIDEWALK
SECTION VIEW

RGL
DESIGNED BY
JMC 3/6/07
DRAWN BY
KAC
APPROVED BY
3-21-07
DATE

SIDEWALKS

NTS



DEPARTMENT
OF PUBLIC
WORKS

207 4th AV. NORTH
KELSO, WASHINGTON
98626

DRAWING:CC-1206

SHEET
1
OF
1