




ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THE LATEST EDITION OF THE WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION

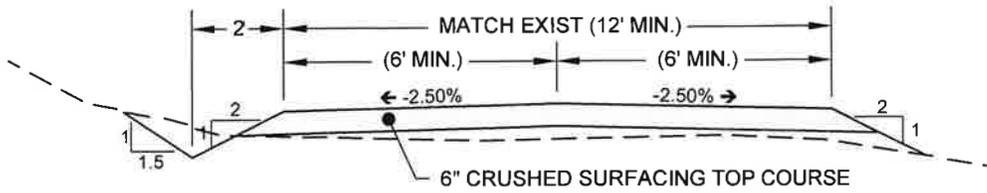

**TYPICAL GRAVEL DRIVEWAY SECTION**

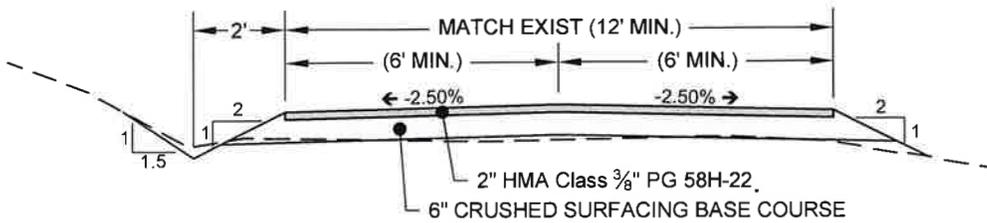

**TYPICAL ASPHALT DRIVEWAY SECTION**

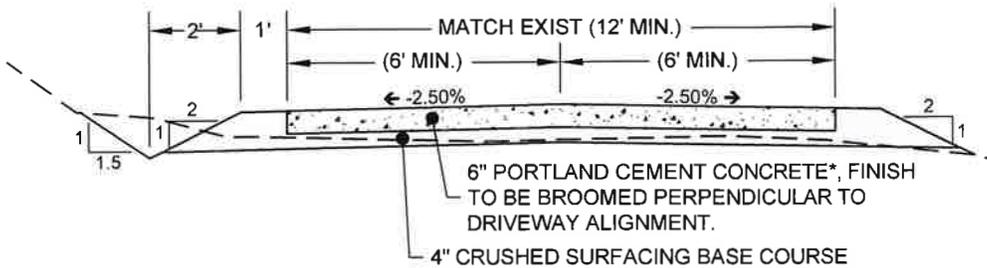

**TYPICAL CONCRETE DRIVEWAY SECTION**

**NOTE:**

- \* Concrete shall have a minimum compressive strength of 3000 p.s.i. after 28 days - 6 sack mix.

|  |   |  |   |                                     |
|--|---|--|---|-------------------------------------|
| CPA<br>DESIGNED BY<br><b>SJM 3/5/25</b><br>DRAWN BY<br><br>APPROVED BY<br><b>3/17/25</b><br>DATE | <b>STANDARD DRIVEWAY</b><br><br><b>TYPICAL SECTIONS</b><br><b>NTS</b> |  | DEPARTMENT OF PUBLIC WORKS<br><br>207 4th AV. NORTH<br>KELSO, WASHINGTON<br>98626<br><br><b>DRAWING:CC-1318</b> | SHEET<br><b>1</b><br>OF<br><b>1</b> |
|--|---|--|---|-------------------------------------|