




ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THE LATEST EDITION OF THE WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION

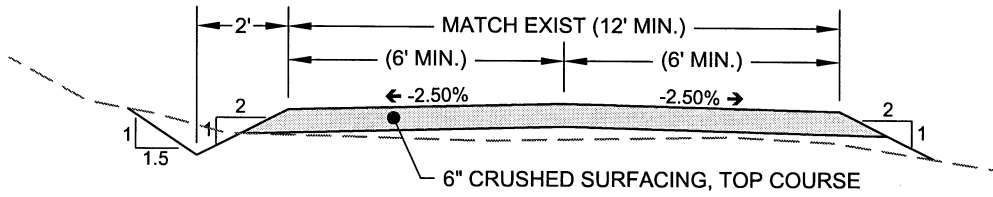

TYPICAL GRAVEL DRIVEWAY SECTION

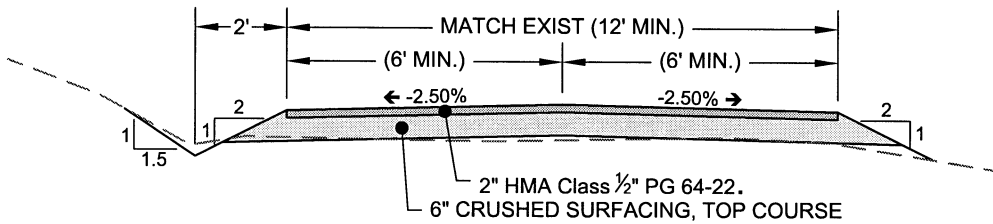


TYPICAL ASPHALT DRIVEWAY SECTION

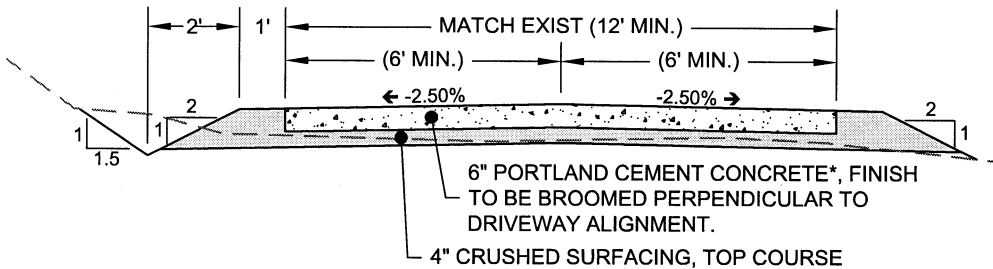

TYPICAL CONCRETE DRIVEWAY SECTION

NOTE:

* Concrete shall have a minimum compressive strength of 3000 p.s.i. after 28 days - 6 sack mix.

| | | | | |
|---|---|--|--|---|
| <p>RGL DESIGNED BY JMC 3/6/07 DRAWN BY <i>KAC</i> APPROVED BY 3-21-07 DATE</p> | <p>STANDARD DRIVEWAY</p> <hr/> <p>TYPICAL SECTIONS N T S</p> |  | <p>DEPARTMENT OF PUBLIC WORKS</p> <p>207 4th AV. NORTH KELSO, WASHINGTON 98626</p> | <p>SHEET 1 OF 1</p> |
| <p>DRAWING:CC-1318</p> | | | | |