



ALL WORK SHALL BE ACCOMPLISHED IN ACCORDANCE WITH THE LATEST EDITION OF THE WSDOT STANDARD SPECIFICATIONS FOR ROAD, BRIDGE, AND MUNICIPAL CONSTRUCTION

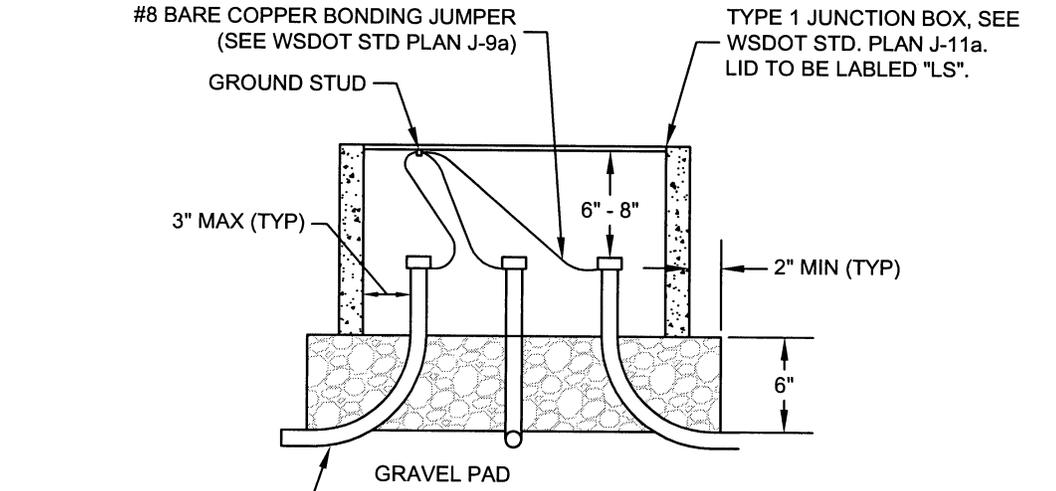

ELEVATION

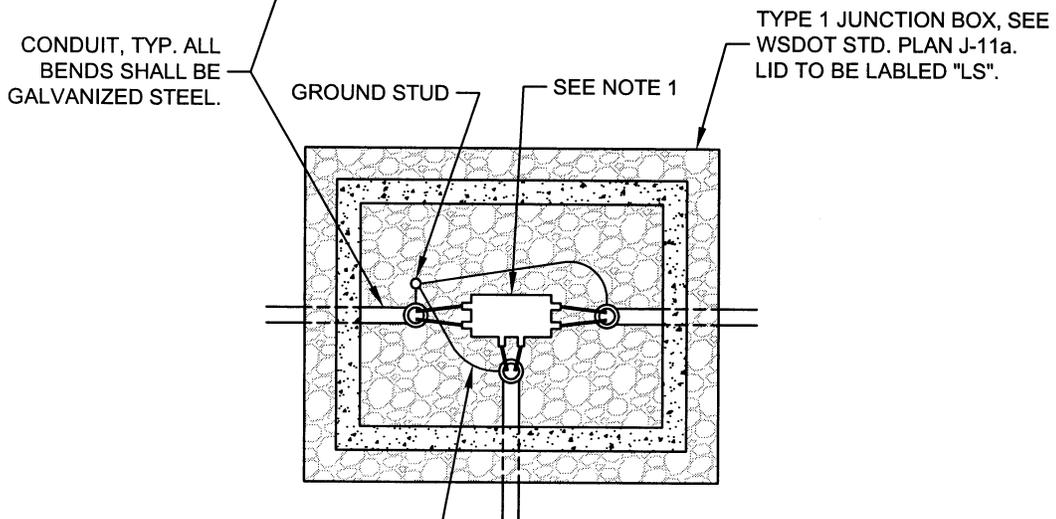

PLAN

NOTES:

1. At all J-boxes in the middle of a circuit, install a non-fusible wye connector (S.E.C. double pin connector, model SEC 1791-DP, or approved equivalent). At the end of the circuit, install a non-fusible single pin connector (model SEC 1791-SP or approved equivalent). There shall be two (2) feet of slack wire between each connection and the end of the circuit.

RGL
 DESIGNED BY
 JMC 3/6/07
 DRAWN BY
 KAC
 APPROVED BY
 3-2-07
 DATE

JUNCTION BOX DETAIL

NTS



DEPARTMENT OF PUBLIC WORKS
 207 4th AV. NORTH
 KELSO, WASHINGTON
 98626

DRAWING:CC-2006

SHEET
 1
 OF
 1